

INNOVATION LEADS TO VALUE



SUNWARD

SL06W WHEEL LOADER

· Rated power/speed: 18.2kW/ 2400rpm · Standard bucket capacity: 0.26m³ · Rated load capacity: 600kg



CONFIGURATION

Canopy

Electric Joystick

0.26(Detachable Shovel Teeth)

Floating Function

BOBCAT Quick Hitch

Pressure Measuring Valve

Italy Hydrostatic Transmission

Engine Preheating



Heater、 Radio with MP3(Cabin)

OPTIONAL

Rops & Fops Cabin With Maintenance Port

Log Grasper

Goods Grasper

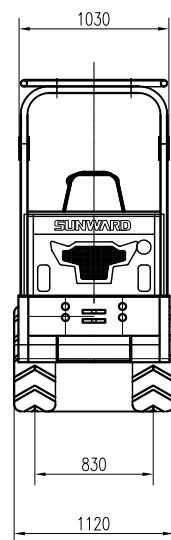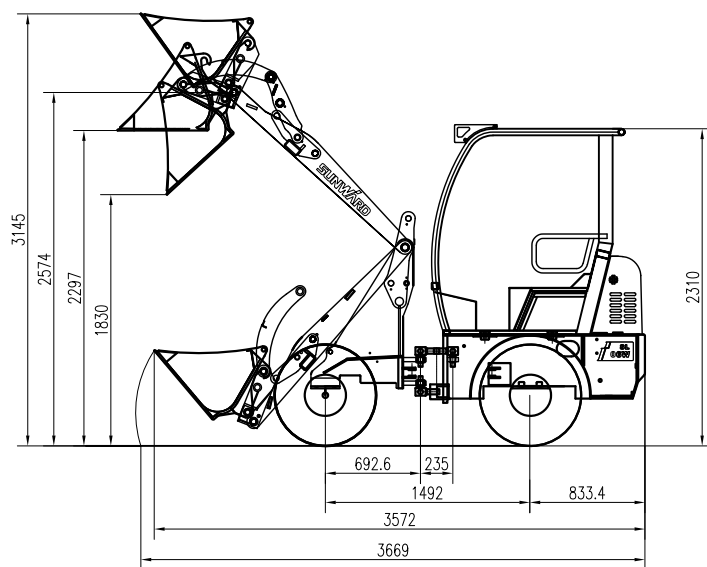

Vehicle parameters

Overall length(bucket on ground)	3669mm
Overall Width	1120 mm
Overall Height	2310 mm
Bucket capacity	0.26 m ³
Rated load	600 kg
Overall Weight	1700 kg
Max.Breakout Force	13.0 kN
Max.Tractive Force	16.7 kN
Max.Dumping height	1830 mm
Max.Dumping reach	800 mm
Min.base to the ground	220 mm
Wheelbase	1492 mm
WheelTread	830 mm
Tyre	26*12.12

Engine

Manufacturer/model	KUBOTA D1105
Rated Power	18.2 kw
Rated Speed	2400r/min

Transmission System

Type	Hydrostatic
Shift gear control Type	Electric, Stepless
Travel speed	12

Bucket

Bucket width	1200 mm
Bucket type	Heavy-duty bolt on teeth

Operating System

Steering system	Full Hydraulic
Min.turning radius	2466 mm
Driving system	Hydrostatic driving, 4WD

Brake System

Service Brake	Hydrostatic brake
Parking Brake	drum brake

